


ANCHORAGE CENTER  
133.2 360.65  
JUNEAU RADIO  
122.65

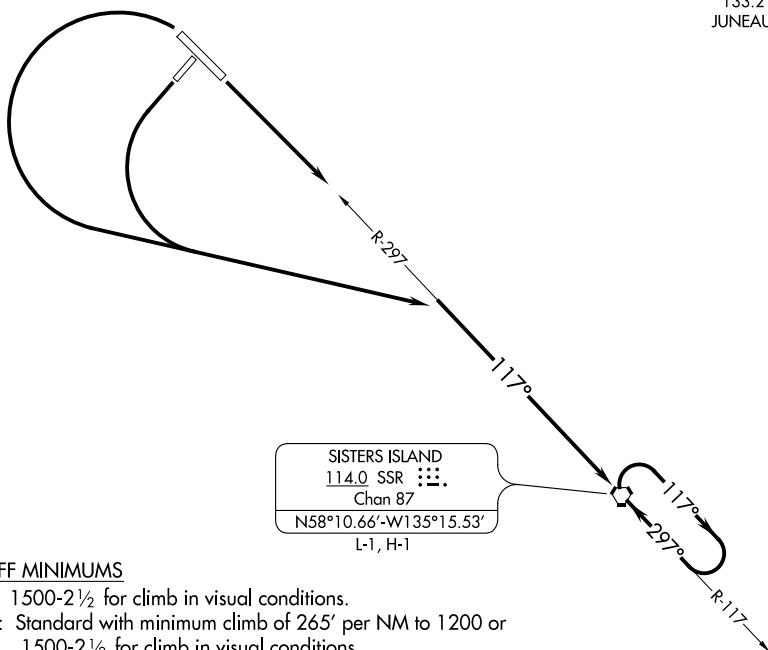

**TAKEOFF MINIMUMS**

- Rwy 2: 1500-2½ for climb in visual conditions.  
Rwy 11: Standard with minimum climb of 265' per NM to 1200 or 1500-2½ for climb in visual conditions.  
Rwy 20: Standard with minimum climb of 323' per NM to 1200 or 1500-2½ for climb in visual conditions.  
Rwy 29: Standard.

**TAKEOFF OBSTACLE NOTES**

- Rwy 11: Trees beginning 1009' from DER, 151' left and right of centerline, up to 140' AGL/147' MSL.  
Bush 140' from DER, 472' right of centerline, 24' AGL/34' MSL.

NOTE: Chart not to scale.

**DEPARTURE ROUTE DESCRIPTION**

**TAKEOFF RUNWAY 2:** Climb in visual conditions to cross Gustavus Airport at or above 1500, continue climb to at or above 3000 via SSR VORTAC R-297 to SSR VORTAC. When executing VCOA, notify ATC prior to departure.

**TAKEOFF RUNWAY 11:** Climbing right turn to at or above 3000 to intercept SSR VORTAC R-297 to SSR VORTAC or climb in visual conditions to cross Gustavus Airport at or above 1500 then climb to at or above 3000 via SSR R-297 to SSR VORTAC. When executing VCOA, notify ATC prior to departure.

**TAKEOFF RUNWAY 20:** Climbing left turn to at or above 3000 to intercept SSR VORTAC R-297 to SSR VORTAC or climb in visual conditions to cross Gustavus Airport at or above 1500 then climb to at or above 3000 via R-297 to SSR VORTAC. When executing VCOA, notify ATC prior to departure.

**TAKEOFF RUNWAY 29:** Climbing left turn to at or above 3000 to intercept SSR VORTAC R-297 to SSR VORTAC.